

### PRODUCT DESCRIPTION

SPECTEC's Intrinsically Safe frequency to current converter and preamplifier for passive magnetic VRS sensors is designed for installation in hazardous locations. The 'ELBY' housing type will fit in ELBY50 and ELBY75 explosion proof junction boxes. The 'A' housing type will fit in a GAUL-16 or similar standard explosion proof junction box.

### INSTALLATION

**CAUTION: This sensor MUST be installed with an FM approved barrier and following the details specified in the Installation Instruction Document #85049.**

### SPECIFICATIONS

- Supply Voltage:** 9 to 30 Vdc @  $\leq 4$  mA
- Input Sensitivity:** 50 mVpp or 12 mVpp
- Frequency Range:** Low Freq: 75 Hz to >1100 Hz  
 Adjustment (Fmax): High Freq: 1100 Hz to ~10kHz
- Frequency to Output Correlation:** 0 Hz input yields 4 mA signal  
 Fmax input yields 20 mA signal
- Output Current:** 0.07 mA to 24.1 mA  
 (Full scale, min cal, zero cal @ 4mA)
- Linearity:** 0.15% Typical (0.5% Max)
- Output Settling:** 100ms to 3 sec to reach 95% of final value from full scale change
- Temp Coefficient:** between 25° and 40°C, 0.13%/°C
- Construction:** Plastic housing  
 Solid Epoxy Encapsulation

### TERMINAL CONNECTIONS

- 1 - Supply Voltage
  - 2 - Common
  - 3 - Signal
  - 4 - Mag Sensor (IS only)
  - 5 - Mag Sensor (IS only)
- (see IS40 & IS41)

### FEATURE SELECTION


- IS4027-10** Mag Preamplifier 12mV (US & C cert.)
- IS4027-50** Mag Preamplifier 50mV (US & C cert.)
- IS4027A-10** Mag Preamplifier 12mV (ATEX & IECEx cert.)
- IS4027A-50** Mag Preamplifier 50mV (ATEX & IECEx cert.)

For 'A' housing type add 'A' as a prefix to the P/N suffix:  
 (e.g. IS4027-Axx)  
 Similarly for the ATEX & IECEx version:  
 (e.g. IS4027A-Axx)



For explosion proof junction box refer to bulletin 4001.

For wiring options see page 2.

### 'ELBY' housing type

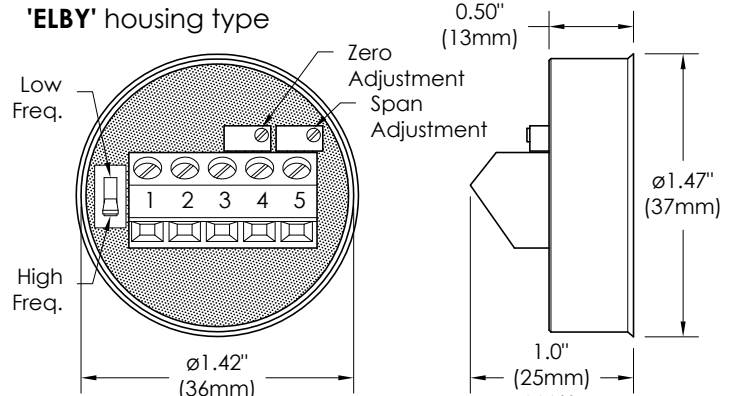

### 'A' housing type (mountable)

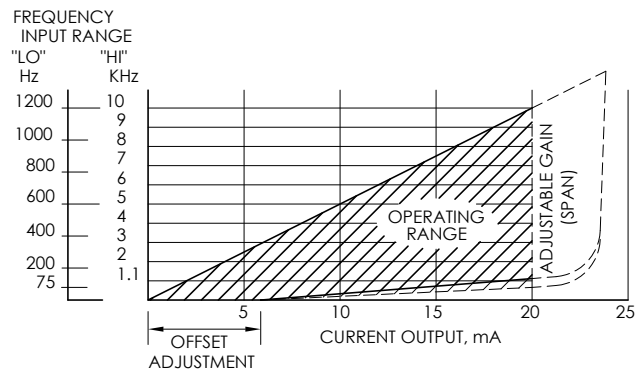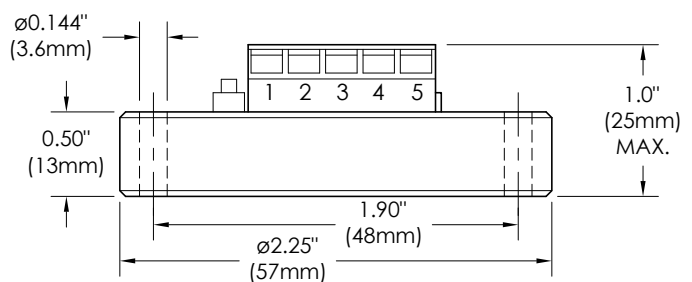

### CERTIFICATIONS for IS4027

**USA:** Intrinsically Safe  
 Class I, II, III, Division 1  
 GROUP ABCDEFG T6...T4  
 Class I, Zone 0, AEx ia IIC T6...T4

**Canada:** Intrinsically Safe  
 Class I, Division 1  
 GROUP ABCD T6...T4  
 Class I, Zone 0, Ex ia IIC T6...T4  
 T4 @  $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +85^{\circ}\text{C}$   
 T5 @  $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +80^{\circ}\text{C}$   
 T6 @  $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +60^{\circ}\text{C}$

### CERTIFICATIONS for IS4027A

**ATEX:** II 1 G Ex ia IIC T6...T4 Ga  
 FM08ATEX0068X

**IECEx:** Ex ia IIC T6...T4 Ga  
 IECEx FMG 16.0003X

T4 @  $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +85^{\circ}\text{C}$   
 T5 @  $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +80^{\circ}\text{C}$   
 T6 @  $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +60^{\circ}\text{C}$

**CE:** Compliance with  
 EN55011, EN50082-1


# IS4027 & IS4027A FTC Converter Wiring Options

## Voltage Mode (3 wire)


For use with long wire runs  
Resistant to line losses & EMI

$$R \text{ Load} \leq \frac{V_s - 9 \text{ V}}{0.02 \text{ A}}$$


$V_s$	R Load
12 V	$\leq 150 \Omega$
24 V	$\leq 750 \Omega$

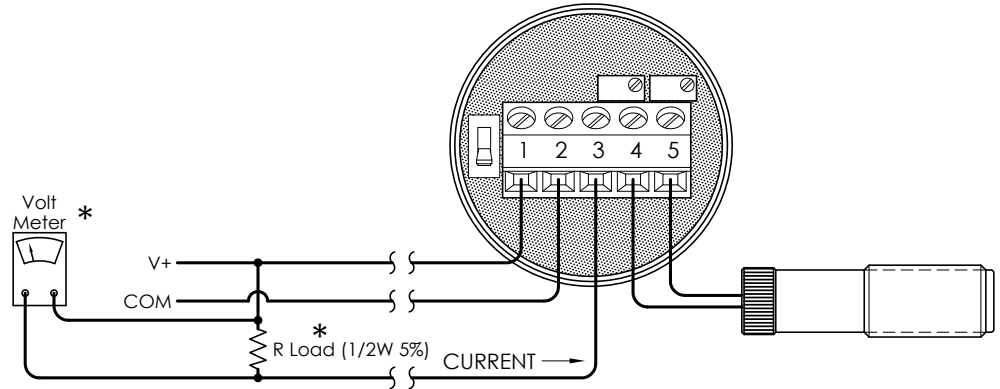

## Current Mode 1 (2 wire)

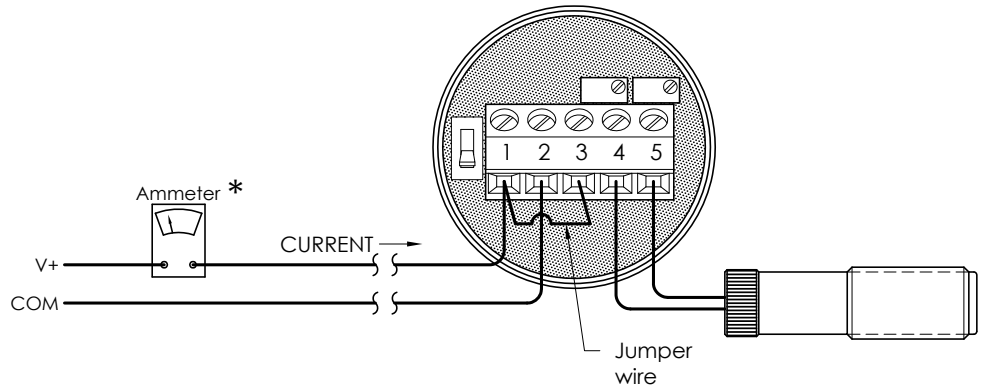

## Current Mode 2 (3 wire)

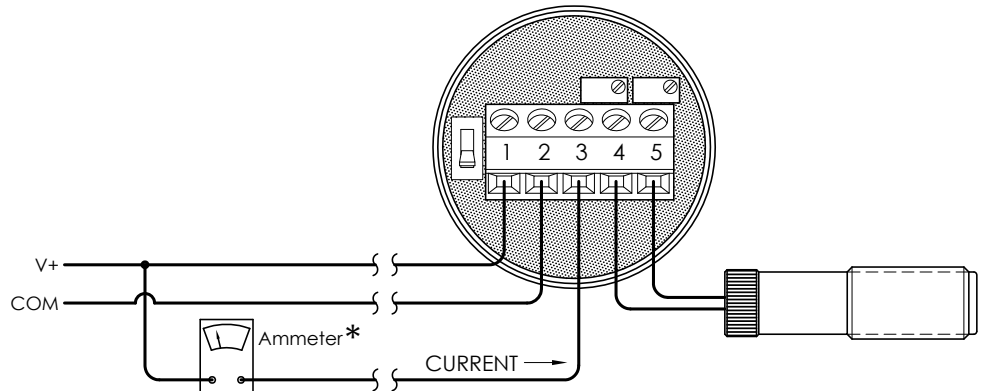

- \* Note: 1. Load resistor to be installed outside the hazardous area.  
2. Conduct measurements outside the hazardous area.