


CONSTRUCTION: FULLY SEALED & EPOXY ENCAPSULATED,  
 WATER & PRESSURE TIGHT TO 100 PSI MIN. NEMA 4 & 6  
 HOUSING: 303/304 STAINLESS STEEL  
 LEADWIRE: PVC, 22 AWG, 105°C UL, CSA (TEW)  
 OPTIONS: LEADWIRE TYPE & LENGTH (CALL FACTORY)

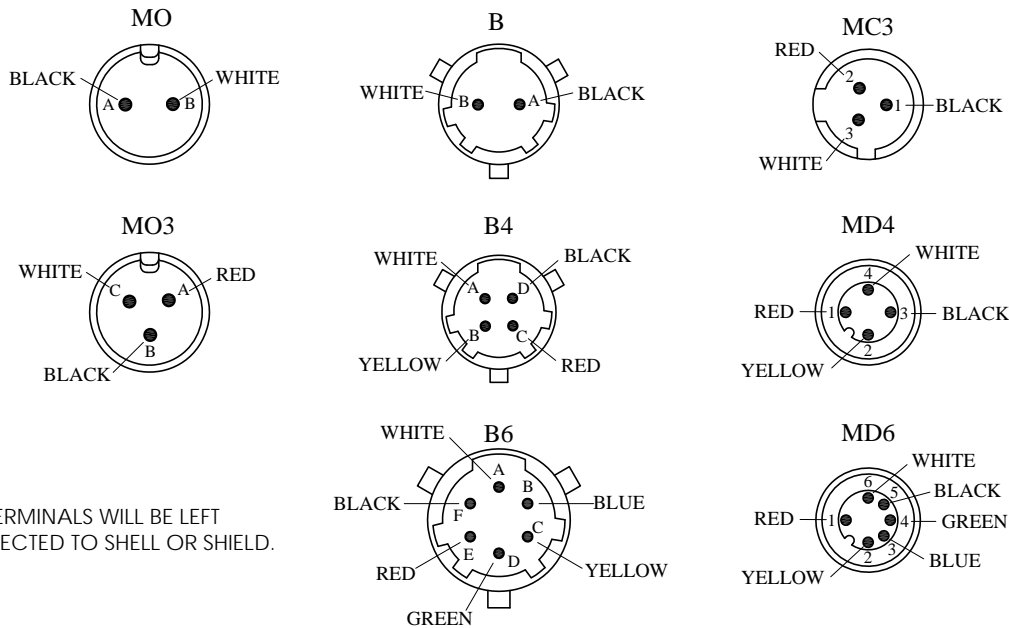

NOTE: UNUSED TERMINALS WILL BE LEFT OPEN OR CONNECTED TO SHELL OR SHIELD.

### PRODUCT DETAILS

CONNECTOR				MATING CONNECTOR	
SPECTEC P/N	CODE	DESCRIPTION	SPECIFICATIONS	SPECTEC P/N	SPECIFICATIONS
3059-02	MO	2-PIN, 5/8-24 THREADED	MS3102A10SL-4P	3000-002	MS3106A10SL-4S
3059-03	MO3	3-PIN, 5/8-24 THREADED	MS3102A10SL-3P	3000-003	MS3106A10SL-3S
3059-22	B	2-PIN, BAYONET	MS3113H8-2P	3001-002	MS3116F8-2S
3059-24	B4	4-PIN, BAYONET	MS3113H8-4P	3001-004	MS3116F8-4S
3059-26	B6	6-PIN, BAYONET	MS3113H10-6P	3001-007	MS3116F10-6S
3059-34	MD4	4-PIN, DIN M12x1	SEE BULLETIN 3005		
3059-36	MD6	6-PIN, DIN M12x1			