

PRODUCT DESCRIPTION

The 4013 & 4014 family of preamps are designed to work with all RF (modulated carrier) pickups. They provide for remote signal conditioning and signal amplification, which allows for signal detection over a wide temperature range (from cryogenic to 400°C depending on the RF pickup in use) as the pickup is capable of sustaining a wider temperature range than the preamp. The 4013 is designed to fit into a compact Y1 explosion proof junction box. We offer both the RF4 (Cox) and RF10 (FTI) types together with various output options to best suit specific applications. For RF pickups with integral preamp refer to Digispec 0095 to 0098 family of sensors.

SPECIFICATIONS



RF Pickup types: RF4 (4 Ω, 0.45 mH)
 RF10 (12 Ω, 1.0 mH)

Sensitivity: STD (Low) ~ 0.5 to ~4000Hz
 HS (High) ~ 0.3 to ~6000Hz (*Recommended)
 (depending on target mass & distance)


Temperature Range
 4013 & 4014x: -40° to 220° F (-40° to 105° C)
 4014x-xx-3TE: -49° to 284° F (-45° to 140° C)

Compliance: CE: EN55011, EN50022-2


OUTPUT CONFIGURATIONS

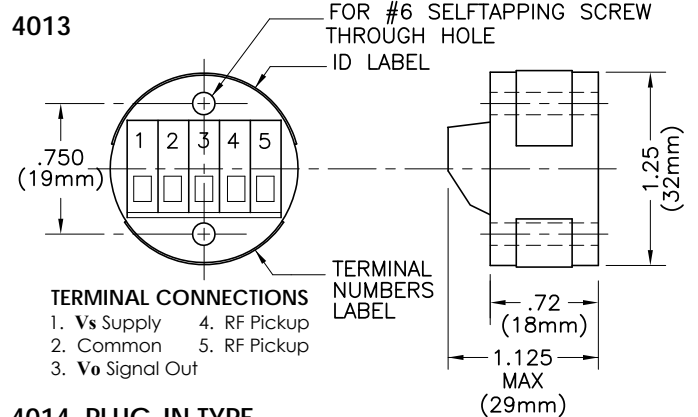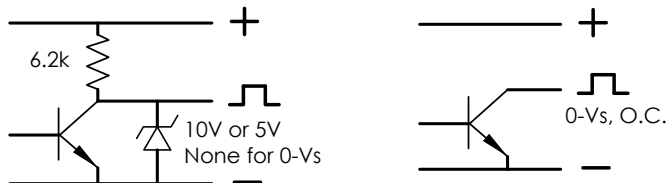


4014 PLUG-IN TYPE

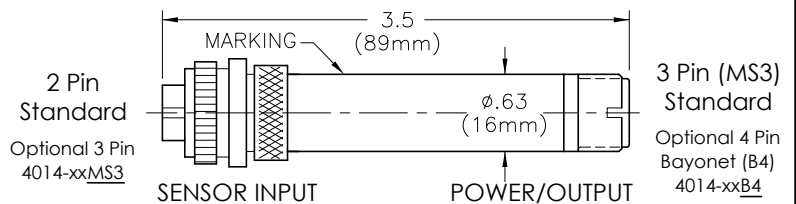


4014M PLUG-IN TYPE (MALE)

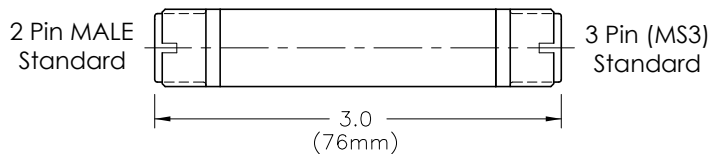


STANDARD PIN CONNECTIONS

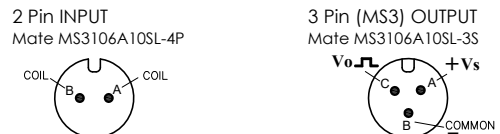

SPECIAL PIN CONNECTIONS

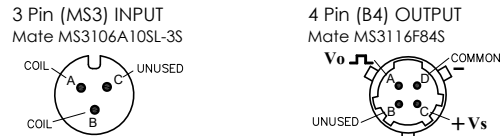

4014H IN-LINE TYPE (ENCAPSULATED)

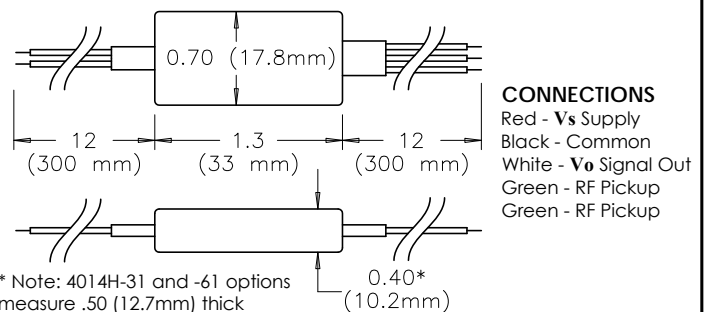

* Note: 4014H-31 and -61 options measure .50 (12.7mm) thick

OPTIONS

For Junction Boxes and adapter hardware, Explosion proof UL & CSA certified, see Bulletin 4001
 For mating cable assemblies, see Bulletin 3000 (MS3) or 3001 (B4)
 Other options: Please contact sales.

Model Variations:			RF Preamp P/N	
Sensitivity	Supply Voltage Vs	Signal Output Voltage Vo	RF4	RF10
STD	11.5-30 VDC @ ≤ 16 mA	0 -10V	-01	
		7-30 VDC @ ≤ 10 mA	0 - 5V (TTL) 0 -Vs, OC	
	3.3-30 VDC @ ≤ 15 mA	0 -10V	-11	
		0 - 5V (TTL)	-12	
		0 -Vs w/6.2k	-13	
		0 -Vs, OC	-16	
HS Recommended	11.5-30 VDC @ ≤ 16 mA	0 -10V	-20	-50
		0 -10V (50 kHz)	-21	-51
		0 - 5V (TTL)	-23	-53
		0 - 5V (50 kHz)	-24	-54
		0 -Vs w/6.2k	-27	-57
		0 -Vs, OC	-30	-60
		0 -Vs, NPN/PNP	-31	-61
0 -12V	-32	-62		