

SPECTEC


THUNDERBIRD INTERNATIONAL CORPORATION
 P.O. BOX 360, EMIGRANT, MT 59027, USA
 (406) 333-4967 FAX: (406) 333-4259
 www.spectecensors.com

4001 JUNCTION BOXES & ADAPTERS EXPLOSION PROOF FOR PREAMPS


PRODUCT DESCRIPTION

SPECTEC's puck type preamps are designed to fit compact "ELBY" and "Y" type explosion proof junction boxes. When a larger enclosure is required our preamps will need an adapter plate or ring to fit securely in a "Y-3", "ELBY-100" or "GUAL16" enclosure, (see table below).


ADAPTER RING FOR 4022, 4027 or 4028 IN GUAL16
 40015-001

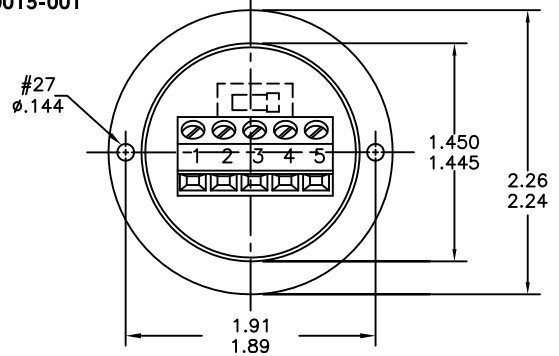


ADAPTER PLATE FOR 4023 IN Y-3 J-BOX
 40003-001

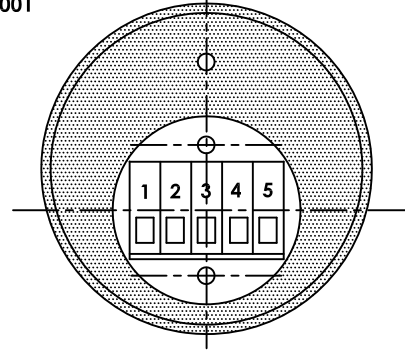


ADAPTER PLATE FOR 4023 IN GUAL16 J-BOX
 40005-001

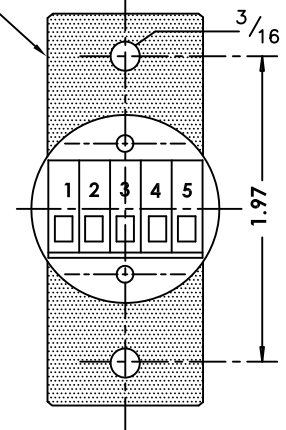

Y or ELBY

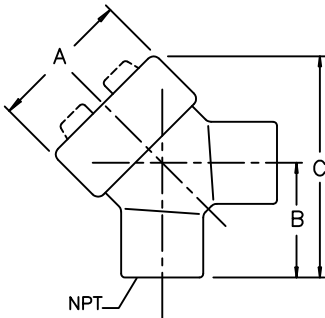

GUAL16

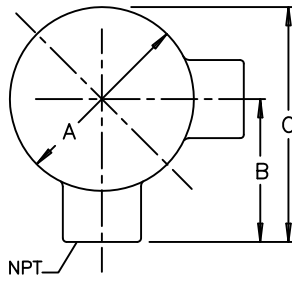

EXPLOSION PROOF JUNCTION BOXES, Y, ELBY & GUAL16 SERIES
 CL I GR C,D, CL II GR E,G,F, CL III CSA & UL CERTIFIED

JUNCTION BOXES						Direct Fit: Adapter Not Required Preamp #	PUCK ADAPTER KITS	
MODEL	SPECTEC P/N	NPT	A	B	C		Preamp # 4022 4028 4027	Preamp # 4013 4023
Y-1	90010-001	1/2-14	1.875	1.625	2.875	4013 4023		
Y-2	-002	3/4-14	2.10	1.55	2.875	4022 4028 4027		
Y-3	-003	1-11	2.612	2.122	3.721	4016 4026		40003-001
ELBY 50	90012-001	1/2-14	1.95	1.50	2.68	4022 4028 4027		
ELBY 75	-002	3/4-14	1.95	1.50	2.68	4022 4028 4027		
ELBY 100	-003	1-11	2.40	1.80	3.12	4016		
GUAL16	90013-016	1/2-14	3.50	2.53	4.28	4021	40015-001	40005-001

REDUCING NIPPLES To Connect Pickup (1/2-NPT) to Junction Box

CODE	SPECTEC P/N	
R1	90011-001	3/4-14 to 1/2-14 NPT
R2	90011-002	1-11 to 1/2-14 NPT
R3	90011-003	1-11 to 3/4-14 NPT